


Configuration GP-10

Portable System for Human Application

<u>System #</u>	<u>GP-10 Portable Systems with Stand</u>
SPS-HF-4.0	100 mA. HF Portable System

<u>CAT NO.</u>	<u>DESCRIPTION</u>
HF-4.0	<ul style="list-style-type: none"> ● 4.0 kW Constant Potential ● 40 to 115 kVp in 1 kVp steps ● 15 mA Stations; 4, 5, 6, 8, 10, 12.5, 16, 20, 25, 32, 40, 50, 64, 80 & 100 ● 0.001-10 Second exposure time range, 38 total in 25% steps ● 0.1 to 200 mAs ● 0.6 mm x 1.5 mm. Dual focal spot stationary anode tube, 40,000 HU ● 110VAC, 24 Amp <i>or</i> 230VAC, 12A power line requirement
PC	Power Cord – 20 feet long
EC	Exposure Cord – 10 feet long
STD	Stand <ul style="list-style-type: none"> ● Stand on base with wheels for easy maneuverability ● Gas spring arm supports tube to accommodate easy positioning ● Positive mechanical brakes ● Cassette storage box accommodates up to 8 cassettes ● 15" to 81.5" Vertical tube travel ● 132 Lbs. total weight
S-CL	Collimator – Certified manual collimator

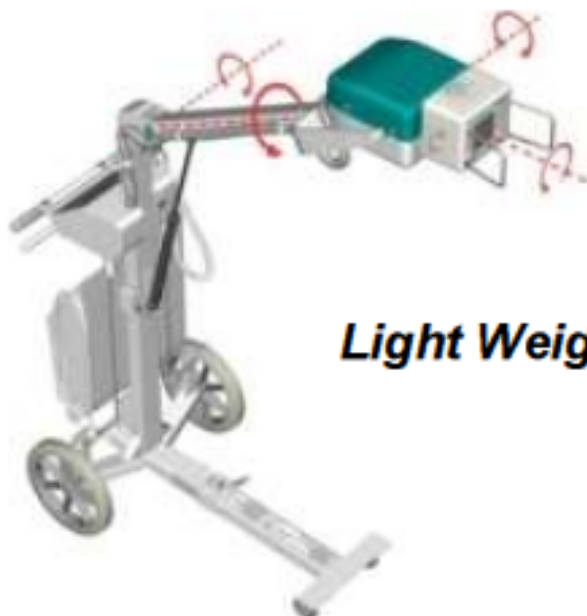

Light Weight - Maneuverable

Powerful 4 kW (Max. 100 mA)

